AllTorque HD

TORQUE LINK

SMART SENSOR TECHNOLOGY

RUGGED DESIGN

MINIMAL LOSS OF HEADROOM

CLOUD STORAGE

VIEW PILE LOGS ANYTIME, ANYWHERE

THE SOFTWARE

Utilizing bluetooth, your phone connects directly to our hardware, becoming a torque monitoring and data logging device.

The data is stored locally or in the AllTorque cloud, where reports and analysis can be performed.

- No Monitor
- Accurate Torque
- GPS Location

TORQUE

RPM

BULLSEYE
(inclinometer)

Download on the App Store

GET IT ON Google Play

THE HARDWARE

Fabricated for serious jobs, our sleek designs protect the internals, and can accomodate most drives in the field.

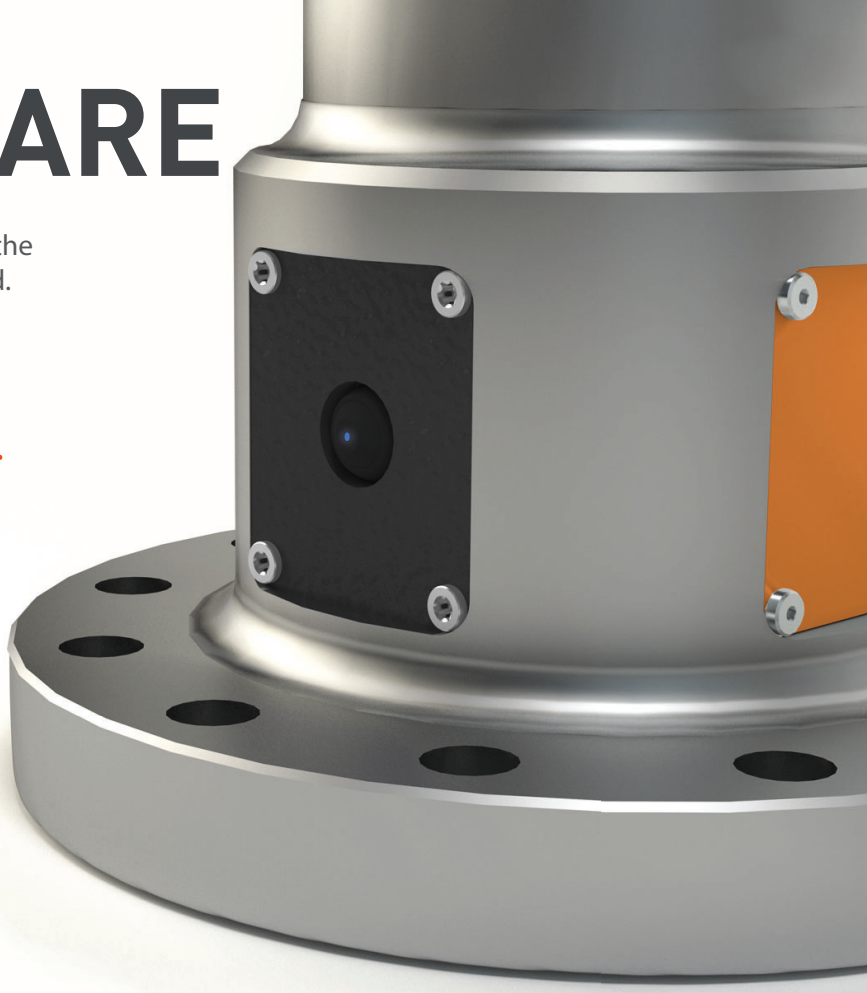

Machined from SOLID BILLET
Ensuring maximum strength

Off-the-Shelf Batteries
Up to 400 hours working time

Bluetooth (BLE)
No loss of connection with high quality signal



TORQUE SPOOLS

UTILIZING A 5-1/4", 7-5/8" BOLT PATTERN

MODEL	TORQUE	DIAMETER	HEIGHT
SP-030	30K	9"	7"
SP-070	70K	10.25"	8"
SP-250	250K	11"	11"
SP-375	375K	11"	11"

TORQUE HUBS

MODEL	HEX INPUT
HB-030-2HX	2"
HB-030-2.5HX	2.5"
HB-030-2.625HX	2-5/8"
HB-030-3HX	3"

SPECS	
TORQUE RATING	30K
FLANGE	9"
BOLT PATTERN	5-1/4", 7-5/8"

HB-070: 100mm (4") SQUARE INPUT HUB



70K RATED



TORQUE LINKS (M-F)

MODEL
MF-030-2HX
MF-030-2.5HX
MF-030-3HX

SPECS	
TORQUE RATING	30K
LENGTH (HOLE TO HOLE)	9-1/8"

FEATURES

1 Click PDF Report

GPS Location

Target Torque

RPM

Torque

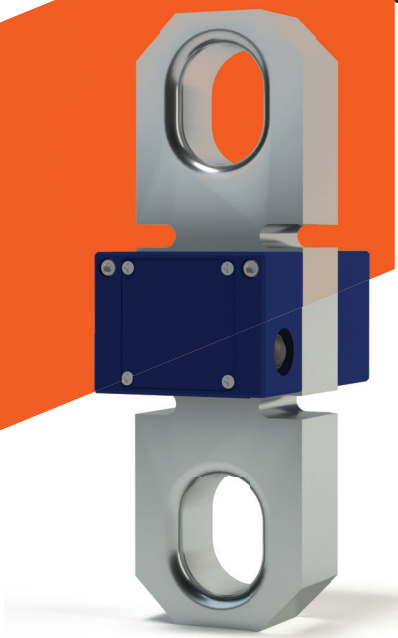

TENSION LINK

Pull-Test your pile with display and logging from the same App.

ALLTORQUE HD
Bay 108, 239 Spruce Street
Red Deer County, Alberta
Canada T4E 1B4

Jim: 403-318-3294
Office: 403-309-2220
Email: jim@alltorque.ca

Fax: 403-346-1410
Email: info@alltorque.ca

www.alltorque.ca